

**TREX SIGNATURE RAILING ELEVATION**  
1/2" = 1'-0"

**DECK FRAME PLAN**

3/16" = 1'-0"

Paper: 8.5 x 11  
Sheet 1 of 2



D1 Support:

Footing: Diameter \_\_\_\_\_  
Depth: \_\_\_\_\_  
Deck Post: 6x6  
Post Base: ABW66Z  
Post Cap: AC6Z/LPC6Z  
Deck Flush Beam: (2) 2x6

D2 Support:

Footing: Diameter \_\_\_\_\_  
Depth: \_\_\_\_\_  
Deck Post: 6x6  
Post Base: ABW66Z  
Post Cap: AC6Z/LPC6Z  
Deck Flush Beam: (2) 2x8

L1 Support:

Footing: Diameter \_\_\_\_\_  
Depth: \_\_\_\_\_  
Landing Post: 6x6  
Post Base: ABW66Z  
Post Cap: AC6Z/LPC6Z  
Landing Flush Beam: 2x8  
Screws: SDWS22500DB

D1 Frame:




Deck Ledger: 2x6  
Fastener Type: \_\_\_\_\_  
Qty & Spacing: \_\_\_\_\_  
Deck Joist: 2x6 @16"oc  
Hanger: LUS26Z Each End  
Deck Front Rim: 2x6 w/Picture Blocking  
Screws: SDWS22500DB

D2 Frame:

Deck Ledger: 2x8  
Fastener Type: \_\_\_\_\_  
Qty & Spacing: \_\_\_\_\_  
Deck Joist: 2x8 @16"oc  
Hanger: LUS28Z Each End  
Deck Side Rim: 2x8 w/Picture Blocking  
Screws: SDWS22500DB

L1 Frame:

Landing Joist: 2x8 @16"oc  
Hanger: LUS26Z Each End  
Landing Side Rim: 2x8 w/Picture Blocking  
Screws: SDWS22500DB

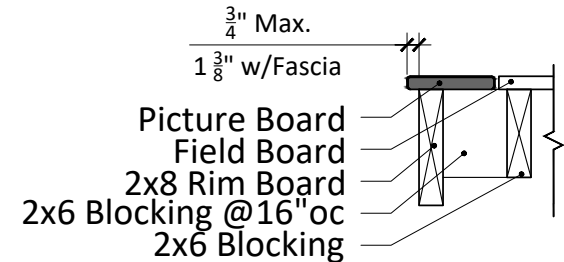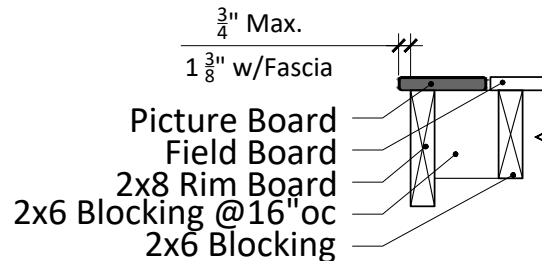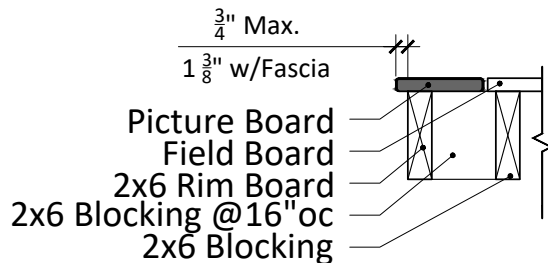

D1 Rail:

Not Required  
Deck Less than 30" above Grade

D2 Rail:

Trex Signature Railing  
Surface Mount

L1 Rail:

Trex Signature Railing  
Surface Mount

Stair:

Max. Rise: 7 3/4"  
Min. Run: 10"  
Stair Stringer: 2x12 @9"oc  
Hanger: LSCZ

